



Express Mail No.: EL 500 575 697/US

PATENT

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Application of: Munetaka TSUDA

Serial No.: 09/535,241

Filed: March 27, 2000

For: MAGNETIC RESONANCE
IMAGING APPARATUS AND
METHOD FOR MAINTAINING
HIGH UNIFORMITY OF
MAGNETIC FIELD IN MAGNETIC
RESONANCE IMAGING
APPARATUS

Group Art Unit: 2862

Examiner: T. Fetzner

Attorney Docket No.: 9202-0009

Handwritten: #0/Raing
Jhon
9/13/02

SUBMISSION OF ENGLISH TRANSLATIONS UNDER 37 C.F.R. § 1.55

Assistant Commissioner for Patents
Washington, D.C. 20231

Sir:

In reference to the Office Action dated April 24, 2002 and pursuant to 37 C.F.R. § 1.55(a)(4), Applicant submits herewith English translations of the certified priority documents, JP11-83744 (filed March 26, 1999 in Japan) and JP11-357283 (filed December 16, 1999 in Japan). Applicant respectfully requests that these translations be made of record in the file of the subject application.

No fee is believed to be due for this submission. Should any fee be required, please charge the same

Respectfully submitted,

Date August 23, 2002


Charles E. Miller

24,576
(Reg. No.)

PENNIE & EDMONDS LLP
1155 Avenue of the Americas
New York, New York 10036-2711
(212) 790-9090

Attorney for Applicants

Enclosures



PATENT OFFICE
JAPANESE GOVERNMENT

This is to certify that the annexed is a true copy of the following application as filed with this Office.

Date of Application:	March 26, 1999
Application Number:	Patent Appln. No. 11-083744
Applicant(s):	Hitachi Medical Corporation

March 17, 2000

Commissioner,
Patent Office Takahiko Kondo
Certificate No. 2000-3018510

11-083744

(Name of Document)	Application for patent
(Attorney's Reference No.)	H 9907
(Filing Date)	March 26, 1999
(Addressee of Application)	Director General of Japanese Patent Office
(International Classification)	A61B 5/00
(Title of Invention)	MAGNETIC RESONANCE IMAGING APPARATUS AND METHOD FOR MAINTAINING HIGH UNIFORMITY OF MAGNETIC FIELD IN MAGNETIC RESONANCE IMAGING APPARATUS
(Number of Claims)	4
(Inventor)	
(Address)	c/o Hitachi Medical Corporation, of No. 1-14, Uchi-kanda 1-chome, Chiyoda-ku, Tokyo
(Name)	Munetaka TSUDA
(Applicant)	
(Identification No.)	000153498
(Name)	Hitachi Medical Corporation
(Representative)	Yutaka TAKUMA
(Attorney)	
(Identification No.)	100099852
(Patent Attorney)	
(Name)	Kimiko TADA
(Attorney)	
(Identification No.)	100099760
(Patent Attorney)	
(Name)	Keizo MIYAGAWA
(Official fee)	
(Pre-payment Note No.)	035725
(Amount Paid)	21,000 Yen
(List of Appended Documents)	
(Document)	Specification 1
(Document)	Drawings 1
(Document)	Abstract 1

(Proof)

Needed

1 1 - 8 3 7 4 4

[Name of Document] Specification

[Title of Invention] MAGNETIC RESONANCE IMAGING APPARATUS AND
METHOD FOR MAINTAINING HIGH UNIFORMITY OF MAGNETIC FIELD IN
MAGNETIC RESONANCE IMAGING APPARATUS

[Claims]

[Claim 1] A magnetic resonance imaging apparatus comprising:

- a static magnetic field generating unit that generates
a static magnetic field of a constant magnetic field intensity;

- an gradient magnetic field generating unit that generates
a magnetic field strength gradient;

- a high-frequency magnetic field generating unit;

- a detecting unit that detects nuclear magnetic resonance
signals generated from an object to be examined; and

- means for processing the nuclear magnetic resonance
signals and displaying the result,

wherein

- the magnetic resonance imaging apparatus further
comprises:

- a magnetic field correcting unit that generates an
additional magnetic field for making a space distribution of
the static magnetic field uniform;

- a temperature detecting unit that detects a temperature
of the static magnetic field generating unit and/or
surroundings thereof; and

- a control unit that controls the magnetic field correcting
unit based on the temperature detected by the
temperature-detecting unit.

[Claim 2] A magnetic resonance imaging apparatus according to
claim 1,

- wherein the control unit has a temperature setting unit
that sets a temperature detected by the temperature-detecting
unit.

[Claim 3] A method of maintaining a static magnetic field
generated by a static magnetic field generating unit uniform

in a magnetic resonance imaging apparatus, by generating an additional magnetic field, the method comprising the steps of:

calculating a temperature dependence of an ununiform component of a space distribution of the static magnetic field;

detecting a temperature of the static magnetic field generating unit; and

calculating a strength of the additional magnetic field based on the detected temperature and the temperature dependence.

[Claim 4] A method according to claim 3,

wherein steps from the temperature detection to the generation of the additional magnetic field are conducted at all times.

[Detailed Explanation of Invention]

[0001]

[Technical Field of Invention]

The present invention relates to a magnetic resonance imaging (hereinafter referred to as MRI) apparatus.

Particularly, it relates to an MRI apparatus and a method suitable for obtaining a high-quality image by maintaining a magnetic field at a high homogeneous value.

[0002]

[Prior Art]

In medical organizations, there is widely used MRI apparatuses that obtain a tomographic image of a human body by utilizing the nuclear magnetic resonance (NMR) phenomenon. Such apparatuses require a magnet that generates a magnetic field of uniform intensity in a space where the part of an object (e.g., a patient) to be examined is disposed in order to accurately image the internal structure of the part. Ideally, a uniform magnetic field space would be obtained within a solenoid coil of infinite length. Therefore, many of the magnets used in MRI apparatuses have slender cylindrical solenoid coils and shimming mechanisms that improve the uniformity of the magnetic fields.

[0003]

In contrast to the MRI apparatus having a slender space for disposing a person (patient) to be examined, there has also

been developed an MRI apparatus which employs a magnet structure with a short length or an open magnet structure having a wide opening. This MRI apparatus helps the patient feel more relaxed by relieving from the sense of confinement and makes it possible to apply an interventional method where the operator provides treatment during the examination using the MRI.

[0004]

The magnet of short length or the magnet having the open structure uses an iron yoke to establish a magnetic circuit. The problem of this structure is that when the iron yoke thermally expands, the intensity and uniformity of the magnetic field change depending on the temperature.

[0005]

In order to solve this problem, a method was developed for controlling the magnet to keep its temperature constant. One example of this technique is disclosed in Japanese Patent No. 2566410.

[0006]

On the other hand, two shimming methods for improving the uniformity of the static magnetic field are available. One is a passive shimming that disposes a magnetic piece to cancel the ununiformity of the static magnetic field. The other is active shimming that changes the current passed through a shim coil in response to uneven variation in the static magnetic field. One proposed active shimming ascertains the level of magnetic field ununiformity by analyzing an NMR signal detected from the examined object, and controls the current passed through the shim coil based on this ununiformity level. This is disclosed in, for example, U. S. Patent No. 5530352.

[0007]

[Problems to be solved by Invention]

The method of controlling the temperature of the magnet itself is an effective method in that it can generate a stable magnetic field regardless of the structure or shape of the magnet. However, this method has the following drawbacks.

(1) In order to keep the magnet at a constant temperature,

the magnet temperature should be kept higher than the normal room temperature. For this purpose, the magnet needs to be surrounded by a high-temperature bath. This narrows the space for disposing the object to be examined.

(2) The magnet has large heat capacity and therefore takes a long time to reach a constant temperature. The temperature control circuit must therefore be operated for a considerable time before the magnet is used for an examination. In actual practice, the magnet is kept applied with current continuously. When a power failure occurs, the apparatus cannot be used until the magnet has recovered a stable temperature level.

(3) It is not possible to cope with a substantial or sudden change in the temperature around the magnet which exceeds the capacity and tracking speed of the magnet temperature control circuit.

[0008]

Further, in new imaging methods which require high uniformity of the magnetic field (such as imaging in which only a fat signal is suppressed, or echo planar imaging EPI, etc.), it is necessary to control the temperature with higher precision and to maintain the uniformity of the magnetic field in a more stable condition than in earlier methods.

[0009]

On the other hand, in the method of reducing the magnetic field ununiformity by using an NMR signal from the examined object, it is necessary to adjust the uniformity of the magnetic field after the object has been disposed in the magnetic field. This lowers the efficiency of the MRI examination. Further, the ununiformity of the magnetic field is different depending on the part of the patient to be examined and the disposed position of the patient. Therefore, this method involves complex adjustments, and is incapable of efficiently overcoming the ununiformity due to temperature variations.

[0010]

An object of the present invention is to provide an MRI apparatus and a method that can stably maintain the uniformity

of the magnetic field without being affected by variations in temperature. Another object of the invention is to provide an MRI apparatus that can achieve high uniformity of the magnetic field and that can improve the quality of MRI examination data.

[0011]

[Means for solving the Problems]

In order to achieve the above objects, according to one aspect of the present invention, there is provided an MRI apparatus which comprises: a static magnetic field generating unit that generates a static magnetic field of a constant magnetic field strength; a gradient magnetic field generating unit that generates a magnetic field strength gradient; a unit that generates a high-frequency magnetic field; a unit that detects a nuclear magnetic resonance signal generated from an object to be examined; and means for processing the nuclear magnetic resonance signals and displaying the result, wherein the MRI apparatus further includes a magnetic field correcting unit that generates an additional magnetic field for making a space distribution of the static magnetic field uniform; a unit that detects a temperature of the static magnetic field generating unit and/or surroundings thereof; and a unit that controls the magnetic field correcting unit based on the temperature detected by the temperature detecting unit.

[0012]

According to the above aspect, the magnetic field correcting unit is controlled based on a detected temperature. The ununiformity of the static magnetic field is corrected based on this control. Therefore, it is possible to eliminate ununiformity of the magnetic field due to temperature variations with good response. Accordingly, it is possible to cope with substantial variations in temperature or sudden changes in temperature. It is also possible to eliminate the need for a high-temperature bath for keeping the static magnetic field generating unit at a constant temperature. Therefore, a large space for disposing the object to be examined can be secured. This makes it possible to improve the efficiency of

interventional work.

[0013]

According to the MRI apparatus of the present invention, the magnetic field correcting unit may include a shim coil and a unit that supplies a current to the shim coil. The control unit controls the current supplied to the shim coil, thereby improving the uniformity of the static magnetic field.

[0014]

Preferably, the control unit controls the magnetic field correcting unit based on a temperature characteristic of the ununiform component of the space distribution of the static magnetic field. The temperature characteristic of the ununiform component can be ascertained in advance. The control unit calculates the ununiform component at a detected temperature based on the detected temperature and the temperature characteristic, and controls the magnetic field correcting unit so as to generate an additional magnetic field that cancels the component.

[0015]

Further, according to the MRI apparatus of the present invention, the temperature detecting unit may be a thermometer disposed within the room. In this case, it is preferable for the thermometer to have a temperature setting unit that supplies the detected temperature to the control unit. The control unit controls the magnetic field correcting unit based on the temperature within the room set by the temperature setting unit. The temperature may be set by the temperature setting unit as a numerical value or a qualitative parameter.

[0016]

According to another aspect of the present invention, there is provided a method for maintaining uniformity of a static magnetic field, which is a method of maintaining uniformity of a static magnetic field generated by a static magnetic field generating unit in an MRI apparatus, by generating an additional magnetic field. This method includes the steps of: obtaining a temperature dependence of an ununiform component of a space

distribution of a static magnetic field; detecting a temperature of the static magnetic field generating unit; and obtaining an intensity of the additional magnetic field based on the detected temperature and the temperature dependence.

[0017]

According to the method for maintaining uniformity of a static magnetic field, the steps from the temperature detection to the generation of the additional magnetic field may be operated at all times, or may be operated as required or periodically. [Preferred embodiments of Invention]

Preferred embodiments of the present invention will be explained hereinafter with reference to the drawings.

[0018]

Fig. 1 is a diagram showing the overall structure of an MRI apparatus according to one embodiment of the present invention. This MRI apparatus includes a static magnetic field generating magnet 2 disposed to sandwich a space in which an object to be examined (e.g., a patient) is placed, gradient magnetic field coils 3 disposed inside the static magnetic field generating magnet 2, high-frequency coils 5 disposed inside the static magnetic field generating magnet 2, and a detecting coil 7 for detecting an NMR signal generated from the object to be examined 1. The MRI apparatus further comprises a sequencer 9 that controls the operation timing of each coil, and a computer 10 that controls the apparatus and processes NMR signals to form an image based on the signals.

[0019]

The static magnetic field generating magnet 2 consists of a pair of superconducting coils 16 facing each other in the drawing, and an iron yoke 17 that forms a magnetic circuit to surround the superconducting coils 16. The static magnetic field generating unit 2 generates a uniform static magnetic field around the object 1 in a direction orthogonal to a body axis of the object 1. This magnetic field has an intensity, or magnetic flux density, of 0.5 tesla, for example. The direction of the magnetic flux is from the floor to the ceiling as shown

by an arrow 18. The uniformity of the magnetic field is adjusted to become approximately 5 ppm or lower in a spherical space having a diameter of 40 cm in which the object 1 is disposed. For adjusting the uniformity of the magnetic field, the passive shimming method is employed, which adheres a plurality of small magnetic pieces (not shown) onto the surface of each superconducting coil 16.

[0020]

The gradient magnetic field coils 3 are three sets of gradient magnetic field coils 3 wound so as to change the magnetic flux density in three axial directions x, y and z that are orthogonal with each other. These gradient magnetic field coils 3 are connected to a gradient magnetic field power source 4. The coils and power source constitute a gradient magnetic field generating unit. According to a control signal sent from the sequencer 9, to be described later, the gradient magnetic field power source 4 is driven to change the values of currents that flow through the gradient magnetic field coils 3. As a result, the gradient magnetic field coils 3 apply gradient magnetic fields G_x , G_y and G_z to the object 1. These gradient magnetic fields are used to obtain a spatial distribution of the NMR signal obtained from an examined part of the object 1 to be examined.

[0021]

The high-frequency coils 5 are connected to a high-frequency power amplifier 6 that supplies a high-frequency current to the high-frequency coils 5, and generate a high-frequency magnetic field for exciting the resonance of atomic nuclei (usually, hydrogen atomic nuclei) of the examined part of the object. The high-frequency power amplifier 6 is controlled by the control signal of the sequencer 9.

[0022]

The detecting coil 7 is connected to a receiver 8 to constitute a unit that detects the NMR signals. The receiver 8 amplifies and detects the NMR signals detected by the detecting coil 7, and converts these signals into digital signals that can be processed by the computer 10. The sequencer 9 also

controls the operation timing of the receiver 8.

[0023]

The computer 10 performs reconstruction of image and calculation of spectrum by using the NMR signals converted into the digital signals. At the same time, the computer 10 controls the operation of each unit of the MRI apparatus at predetermined timing through the sequencer 9. The computer 10, a memory unit 12 that stores data, and a display unit 11 that displays the processed data constitute an operating and processing system.

[0024]

In addition to the above units, the MRI apparatus is provided with a magnetic field correcting system that maintains the uniformity of the magnetic field generated by the static magnetic field generating magnet 2. The magnetic field correcting system consists of a thermometer 13 that detects temperature and outputs an electric signal corresponding to the detected temperature, a shim power source 14 that changes its output current based on the output signal value of the thermometer 13, and a shim coil 15 that generates a correction magnetic field (additional magnetic field) when the output current from the shim power source 14 is applied to the shim coil 15.

[0025]

In the embodiment shown in Fig. 1, the thermometer 13 is disposed on the iron yoke 17 of the static magnetic field generating magnet 2, and detects the temperature of the iron yoke. The shim coil 15 consists of one or a plurality of coils such as a coil that generates a magnetic field of a z^2 term and a coil that generates magnetic field of xy term corresponding to an ununiform component of the static magnetic field. Each shim coil 15 is disposed between the superconducting coils 16 and the gradient magnetic field coils 3. The gradient magnetic field coils 3 may also work as shim coils that generate a linear term correction magnetic field.

[0026]

A method for maintaining the uniformity of the static magnetic field in the MRI apparatus of the above construction

will be explained next based on the flowchart shown in Fig. 2.

[0027]

At first, a relationship between temperature and the ununiformity of the magnetic field, that is, the temperature characteristic of the ununiformity of the magnetic field is measured in advance. For measuring the temperature characteristic of the ununiformity of the magnetic field, the magnitude of the ununiformity (error magnitude) generated by change in temperature is measured for each component of each shim coil (step 27).

[0028]

As explained earlier, the static magnetic field generating magnet 2 is adjusted by the passive shim method by using small magnetic pieces. The static magnetic field generating magnet 2 has the highest uniformity of the magnetic field at 23°C, for example, and the uniformity is 5 ppm or lower in the space in which the object 1 is disposed (that is the spherical space of a diameter 40 cm), as shown in Fig. 3. As the temperature of the static magnetic field generating magnet 2 (particularly, the iron yoke 17) changes from 23°C, the uniformity of the magnetic field decreases from 5 ppm. This is caused by a slight distortion in the structure of the magnet by thermal expansion of the iron yoke that constitutes the magnetic circuit.

[0029]

Such ununiformity of the magnetic field is the sum of the ununiformity of each component such as a linear term component of y (hereinafter to be referred to as y component) and a quadratic term component of z (hereinafter to be referred to as z^2 component). In the case of the y component, for example, the uniformity changes by approximately 6 ppm for a temperature change of 1°C, as shown in Fig. 4. The uniformity changes by approximately 3 ppm in the case of the z^2 component. At step 27, temperature characteristic is obtained for each ununiformity component of the magnetic field (hereinafter to be referred to as error component) in advance.

[0030]

In the meantime, a shim characteristic is obtained for each shim coil in advance (step 28). The shim characteristic is the intensity of the magnetic field generated by the shim coil when a unit current is passed through the shim coil. When the shim characteristic is obtained in advance, it is possible to obtain a current value necessary for generating a desired magnetic field intensity. In the MRI apparatus shown in Fig. 1, the shim coil of the z^2 component, for example, is manufactured to have a size and a coil winding that can generate a magnetic field of the z^2 component by 5 ppm in the spherical space of a diameter 40 cm, when a current of 1 ampere is applied to this shim coil.

[0031]

Next, the temperature of the static magnetic field generating magnet 2 is measured (step 29). Based on the temperature difference between this measured temperature and a reference temperature (the temperature at which the uniformity of the static magnetic field becomes best, for example, 23°C), a change in the error component is calculated for each magnetic field component (step 30). This change of the error component can be found using the temperature characteristic (Fig. 4) of each error component obtained in advance.

[0032]

Then, a shim current that generates a correction magnetic field for canceling the change of the error component is calculated for each shim coil. This current is supplied to the shim coil (steps 31, 32). In the example shown in Fig. 4, when the temperature difference is + 1°C, the change of the error component of the z^2 component is 3 ppm. Therefore, when the shim current that generates - 3 ppm (3/5 ampere in the above example) is applied to the shim coil of the z^2 component (shim characteristic 5 ppm/A), it is possible to cancel the ununiformity of the static magnetic field attributable to the temperature variations.

[0033]

As explained above, by finding the shim current based on

the detected temperature for each of the plurality of shim coils and then applying this current, the uniformity of the magnetic field of the static magnetic field generating magnet 2 can be maintained at the optimum 5 ppm or a lower value regardless of variations in the temperature of the static magnetic field generating magnet 2.

[0034]

The above steps 29 to 31 shown in Fig. 2 may be conducted at all times, or may be conducted for a predetermined period of time for each examination. Alternatively, the steps may be conducted only when the temperature variation exceeds a predetermined temperature range.

[0035]

The above-described control of the shim coils (steps 29 to 31) may be carried out by, for example, a program installed in a computer incorporated in the shim power source 14 or the computer 10 of the MRI apparatus. Alternatively, the shim coils may be controlled by an analog circuit.

[0036]

Fig. 5 shows an embodiment of the shim power source 14 constructed as an analog control circuit. The shim power source 14 includes a voltage amplifier 19 that receives an output voltage from the thermometer 13, a plurality of variable resistors 22a, 22b and 22c that correspond to the plurality of shim coils 15a, 15b and 15c respectively, and voltage/current converters 23a, 23b and 23c. The output voltage v of a thermometer 13 is applied to an input terminal 20 of the voltage amplifier 19 of the shim power source 14.

[0037]

The output voltage of the thermometer 13 is arranged such that a predetermined output voltage v is generated at a reference temperature (for example, 23°C) as a temperature indicated value, and each time the temperature increase by 1°C , the terminal voltage increases by a predetermined quantity of Δv . The output voltage v of the thermometer 13 is input to the voltage amplifier 19.

[0038]

The voltage amplifier 19 is provided with an offset adjustment of $-v$ volt so that the voltage of (input voltage minus v) is amplified by n times, and the output voltage of the voltage amplifier 19 is applied to one end of each of the variable resistors 21a to 21c. Namely, the voltage amplifier 19 generates $n\Delta v$ volt each time the temperature increases by 1°C .

[0039]

The other ends of the variable resistors 21a to 21c are grounded and have voltage of 0. Therefore, it is possible to select any optional value from 0 to nV for the voltages of the variable terminals 22a to 22c, by adjusting the corresponding variable resistors 21a to 21c. Voltages of the variable terminals 22a to 22c are applied to input terminals 24a to 24c of the voltage/current converters 23a to 23c. Adjustment resistors 25a to 25c for adding constant offset currents to the output currents of the voltage/current converters 23a to 23c are added to these voltage/current converters 24a to 24c respectively. Output terminals 26a to 26c of the voltage/current converters 23a to 23c are connected to the shim coils 15a to 15c that generate correction magnetic field components so that currents from these output terminals 26a to 26c are applied to the respective shim coils.

[0040]

The shim coil characteristic of the shim coil 15a is assumed as follows. The change in the magnetic field when a unit current is passed through the shim coil is ϵ_0 (ppm/A), and the change in the magnetic field per $+1^\circ\text{C}$ of the error component corresponding to the shim coil 15a is ϵ_1 (ppm/ $^\circ\text{C}$). Then, the current I [A/ $^\circ\text{C}$] necessary to cancel the change in the magnetic field generated by the temperature change of $+1^\circ\text{C}$ is $I = \epsilon_1 / \epsilon_0$. On the other hand, a current I' supplied to the shim coil 15a based on an output $n\Delta$ [V/ $^\circ\text{C}$] of the voltage amplifier 19 that has detected a temperature change of $+1^\circ\text{C}$ becomes $I' = n\Delta v \cdot x \cdot c$ when the ratio of the output voltage to the input voltage of the variable resistor 21a is expressed as x , and the

conversion factor of the voltage/current converter 23a is c [A/V]. Therefore, in order to make $I = I'$, the variable resistor 21a is adjusted so that the ratio (x) of the output voltage to the input voltage satisfies the following equation (1).

[0041]

$$\begin{aligned} n\Delta v \cdot x \cdot c &= \epsilon_1 / \epsilon_0 \\ x &= \epsilon_1 / (\epsilon_0 \cdot c \cdot n\Delta v) \end{aligned} \quad (1)$$

Thus, it becomes possible to automatically correct the magnetic field in response to the temperature change.

[0042]

It is assumed, for example, that the output voltage of the thermometer 13 is set to 0.5 volt at the reference temperature, and the inter-terminal voltage increases by 0.2 volt when the temperature increases by 1°C. If the voltage amplifier 19 has an amplification factor of five, 1 (0.2 x 5) volt is output per 1°C increase, since the offset voltage of -0.5 volt is set.

[0043]

On the other hand, the correction magnetic field of the z^2 component requires 3 (ϵ_1) ppm for a temperature change of 1°C of the static magnetic field generating magnet 2. When the shim characteristic ϵ_0 of the shim coil 15a of the z^2 component is 5 ppm/A, it is necessary to apply a current of 0.6 ampere in order to generate this 3 ppm by the shim coil 15a of the z^2 component.

[0044]

It is assumed that the voltage/current converter 23a converts an input signal of 1 volt to an output signal of 1 ampere, that is, the conversion factor c is 1. When the variable terminal 22a of the variable resistor 21a is adjusted to a position of 60% ($x = 0.6$), the voltage/current converter 23a can generate a current of 0.6 ampere and can supply the current necessary for generating the correction magnetic field of 3 ppm to the shim coil 15a.

[0045]

By adjusting the variable resistor 21a in advance as

explained above, it is possible to generate the correction magnetic field component of the z^2 to match the temperature change of the static magnetic field generating magnet 2. In other words, in the above example, the 3 ppm of the error component of the z^2 per temperature change of 1°C coincides in absolute value with the -3 ppm of the correction magnetic field of the shim coil 15a. With this arrangement, the uniformity of the magnetic field can be maintained at 5 ppm without being affected by temperature variations.

[0046]

The maintenance of the uniformity of the magnetic field has been explained with regard to the shim coil 15a as one example. For the y component and other components, it is also possible to carry out a similar adjustment of the variable resistor 21 based on the equation (1) when the shim characteristic ϵ_0 and the temperature characteristic ϵ_1 of the component are known in advance. Thus, it is possible to maintain high uniformity of the magnetic field for all the components. When the shim coil that corrects the y component also works as the gradient magnetic field coil of the y axis, the shim current is superimposed on the gradient magnetic field current that is applied to the gradient magnetic field coil of the y axis at the time of imaging.

[0047]

According to the above method for maintaining the uniformity of the magnetic field, it is possible to correct with priority the error component of a magnetic field that has a large variation along with the variation in the temperature. Therefore, it is possible to efficiently maintain the uniformity of the magnetic field. Further, since the ratio of the temperature change of the error component is found and the correction is performed based on the ratio, it is possible to accurately correct the error component. Further, it is easy to structure in a control loop the process from the occurrence of a temperature change to the generation of the correction magnetic field. Therefore, a complex operation can be automated. It is also possible to operate the correction function at all

times.

[0048]

In the embodiment shown in Fig. 1, the temperature is measured by using the thermometer 13 installed on the iron yoke 17 of the static magnetic field generating magnet 2. However, the thermometer 13 may instead be installed near the static magnetic field generating magnet 2. It is also possible to use a room thermometer installed in the room in which the static magnetic field generating magnet 2 is disposed. In this case, it is necessary to provide a temperature setting unit to supply an electric signal corresponding to the detected temperature to the control circuit (shim power source 14) of the shim coil. The temperature setting unit may be integrally provided in the console section of the MRI apparatus, or may be attached to the shim power source 14.

[0049]

The temperature setting unit can replace the thermometer 13 in the control circuit shown in Fig. 5 to transmit an electric signal corresponding to a set temperature to the voltage amplifier 19. The shim current is obtained from the power source 14 based on the temperature set by the temperature setting unit, and then, the power source supplies this shim current to the shim coil in a similar manner to that of the above embodiment. Thus, similar effects to those of the above embodiment can be obtained. However, in this case, it is necessary to take into consideration the time delay of the temperature change of the static magnetic field generating magnet 2 that occurs after the change in the room temperature. The room temperature may be input directly to the temperature setting unit as a numerical value. Alternatively, as the room temperature of the measuring room is kept within the range of $\pm 5^{\circ}\text{C}$, it may be set by means of the temperature level such as "high - medium - low".

[0050]

In the above embodiment, only the case of correcting the ununiformity component of the magnetic field due to the temperature variations of the magnet has been explained.

However, it may be performed together with the conventional active shimming method. The active shimming may be a method that detects NMR signals of the part of the object to be examined, analyzes the detected NMR signal, and applies a correction current to the shim coil to improve the uniformity of the magnetic field. Such an embodiment will be explained hereinafter with reference to Fig. 6.

[0051]

In this embodiment, ununiformity of the magnetic field due to temperature variations is corrected prior to the examination by the MRI apparatus (601 - 603). The temperature characteristic of each error component and shim characteristic of each shim coil are obtained in advance in a similar manner to that shown in Fig. 2. Before the examination, the temperature of the magnet is measured (601). The difference between the temperature at which the magnet achieves optimum uniformity of the magnetic field (reference temperature, for example 23°C) and the measured temperature is obtained. The magnitude of the error component of the magnetic field is calculated from the temperature characteristic of the error component obtained in advance (602). Next, a shim current that generates a correction magnetic field for compensating for the magnetic field error component is obtained, and this current is applied to the shim coil (603). At this stage, the thus obtained uniformity of the magnetic field is similar to the uniformity at the reference temperature.

[0052]

Next, the uniformity of the magnetic field is further corrected with the object to be examined (patient) disposed within the apparatus (604 - 607). At first, the object is disposed so that the area of the patient to be examined is positioned at almost the center of the magnet (604). A high-frequency pulse(s) is applied to the area, and an NMR signal(s) is detected from the area (605). This NMR signal(s) is processed to calculate the error component of the magnetic field (606). This error component of the magnetic field is

generated because the uniformity of the magnetic field was disturbed by a magnetization factor of the examination area of the patient and can be calculated, for example, by calculating the phase difference of the NMR signal. Then a shim current that generates a correction magnetic field for compensating for this error component is calculated (607).

[0053]

In parallel with the above steps 604 to 607, the magnetic field change due to the temperature variation of the magnet is corrected periodically (608 - 611). These steps 608 to 611 are similar to the correction steps 601 to 603 carried out prior to the examination. Passage of a predetermined time period is clocked (611) and the magnetic field is corrected only when the predetermined time period has passed. This time period is determined by taking into account the change factor of the ambient temperature and the temperature time constant of the magnet.

[0054]

The shim current obtained at step 610 is superimposed on the shim current obtained at step 607, and the result is supplied to the shim coil (612). Thus, the error component due to the influence of the magnetization factor of the object and the error component of the magnetic field due to temperature variation of the magnet are corrected. It is thus possible to achieve a high-level uniformity of the magnetic field. The examination of the patient is started in this state (613). The next examination is then conducted if necessary (614).

[0055]

According to this embodiment, it is possible to correct not only the ununiformity of the magnetic field due to temperature variation of the magnet, but also the ununiformity of the magnetic field due to the influence of the magnetization factor of the examination area of the patient. Therefore, an MRI apparatus that achieves high uniformity of magnetic field can be provided. Using the MRI apparatus, a high-quality image can be obtained even when the imaging method requires high uniformity of the magnetic field, such as imaging in which only a fat signal is

suppressed or an EPI.

[0056]

The present invention is not limited to the methods and apparatuses explained above and modified within the scope of claims attached to the specification. It is also possible to use the present invention in parallel with other units or methods for maintaining the magnetic field uniformity. For example, although a superconducting coil is used for the static magnetic field generating magnet in the MRI apparatuses shown in Fig. 1, an ordinary magnetic field generating magnet or a permanent magnet may also be used for the static magnetic field generating magnet. Although Fig. 1 shows apparatuses which generate a static magnetic field in a direction orthogonal to the body axis of the object to be examined, the apparatus may generate a static magnetic field in a direction parallel with the body axis of the object.

[0057]

[Effect of the Invention]

As explained in the above, according to the present invention, the uniformity of the magnetic field is corrected based on changes in the temperature of the magnet or its surroundings. Therefore, it is possible to maintain the uniformity of the magnetic field at a high level. As a result, the reliability of the MRI examination data can be increased. Further, according to the present invention, it is possible to efficiently correct only the ununiformity of the magnetic field attributable to temperature variations, which reduces the imaging time.

[Brief Explanation of Drawings]

[Figure 1] A schematic view of the overall structure of an MRI apparatus according to one embodiment of the present invention

[Figure 2] A flowchart showing one embodiment of a method for maintaining uniformity of a magnetic field according to the present invention

[Figure 3] A graph showing a temperature characteristic of uniformity of a magnetic field of a static magnetic field

generating magnet

[Figure 4] A graph showing temperature characteristics of error components y and z_2

[Figure 5] A diagram showing details of a magnetic field correcting system of the MRI apparatus shown in Fig. 1

[Figure 6] A flowchart showing another embodiment of a method for maintaining uniformity of a magnetic field according to the present invention

[Explanation of Symbols]

- 1 object to be examined
- 2 static magnetic field generating magnet
- 3 gradient magnetic field coil
- 4 gradient magnetic field power source
- 5 high-frequency coil
- 6 high-frequency power amplifier
- 7 detecting coil
- 8 receiver
- 10 computer(signal processing unit)
- 13 thermometer(temperature detecting unit)
- 14 shim power source(control unit)
- 15 shim coil(magnetic field correcting unit)

FIG. 1

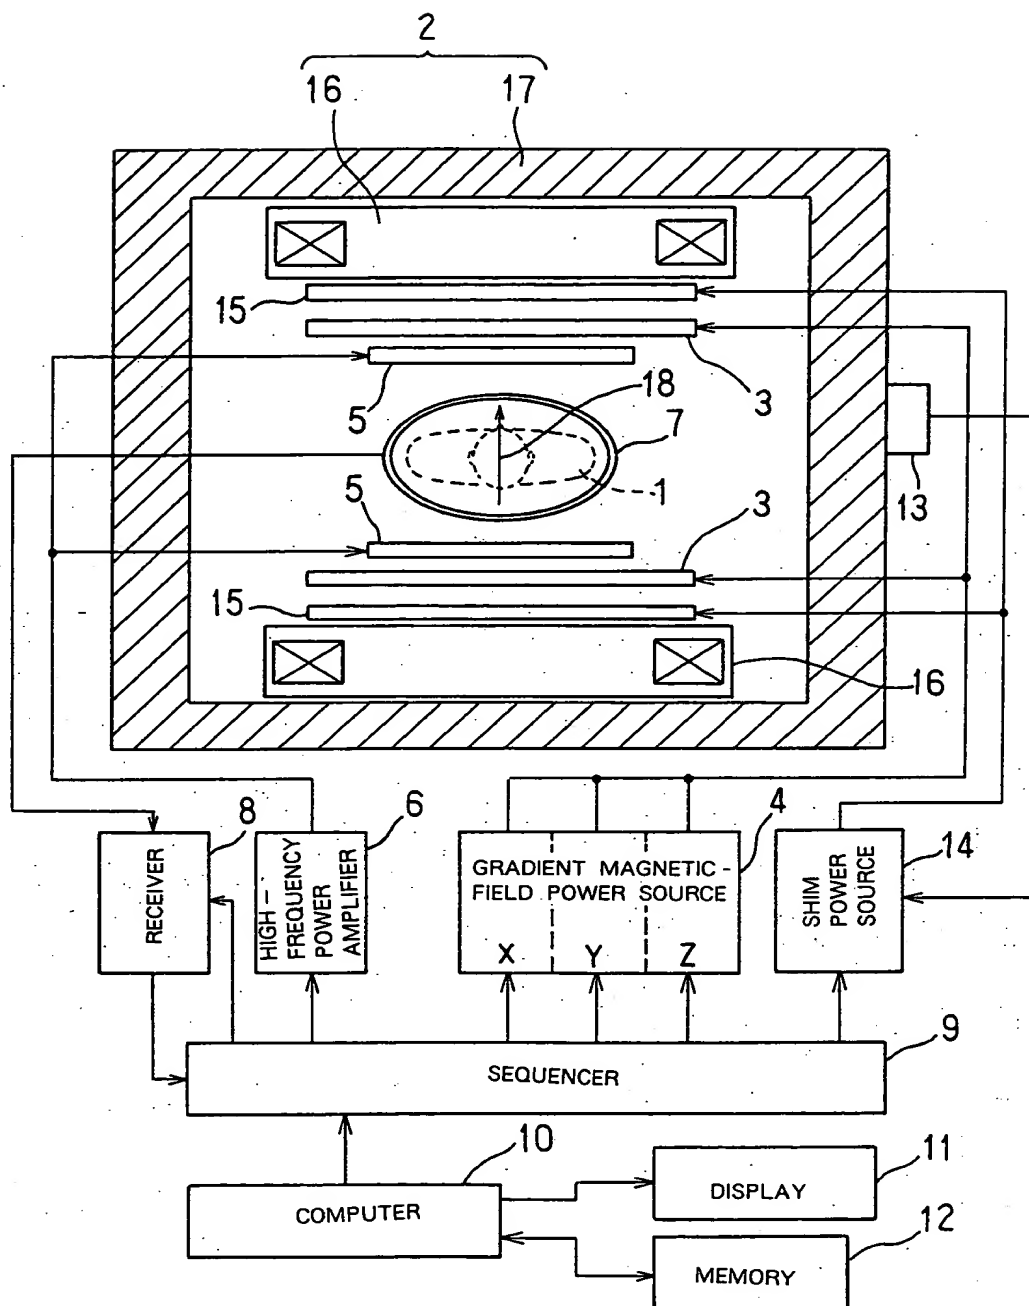


FIG.2

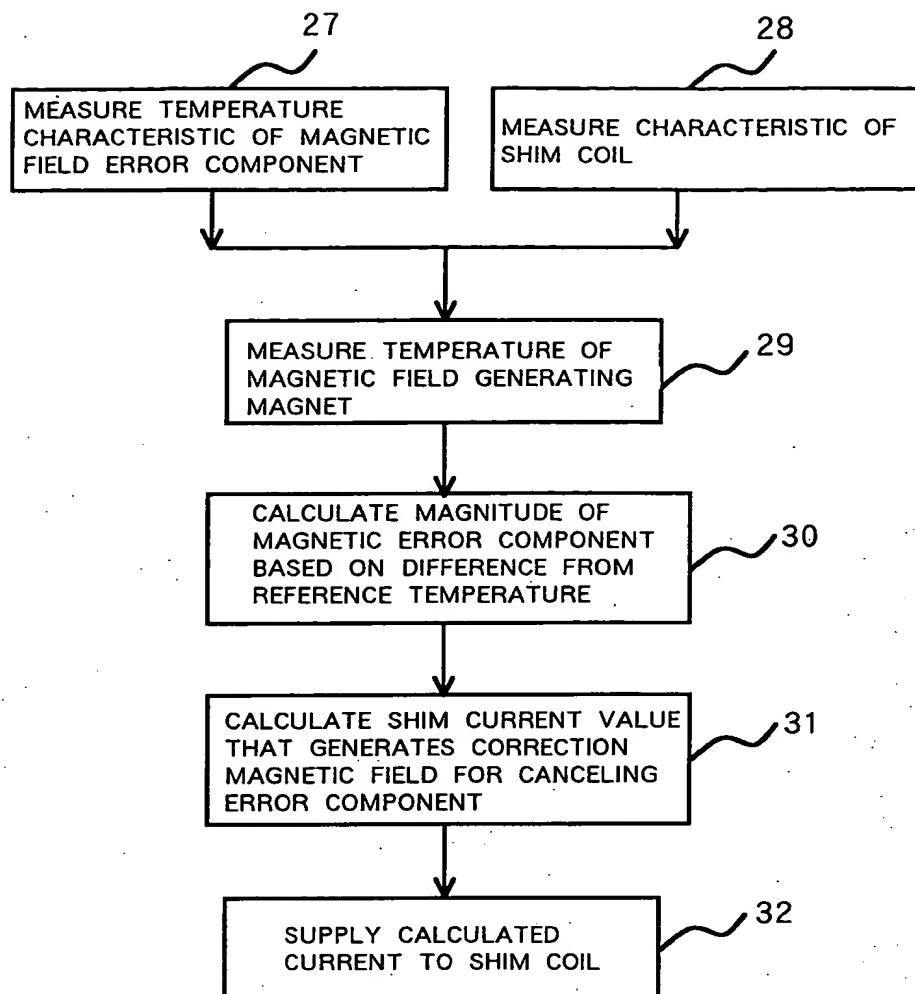


FIG.3

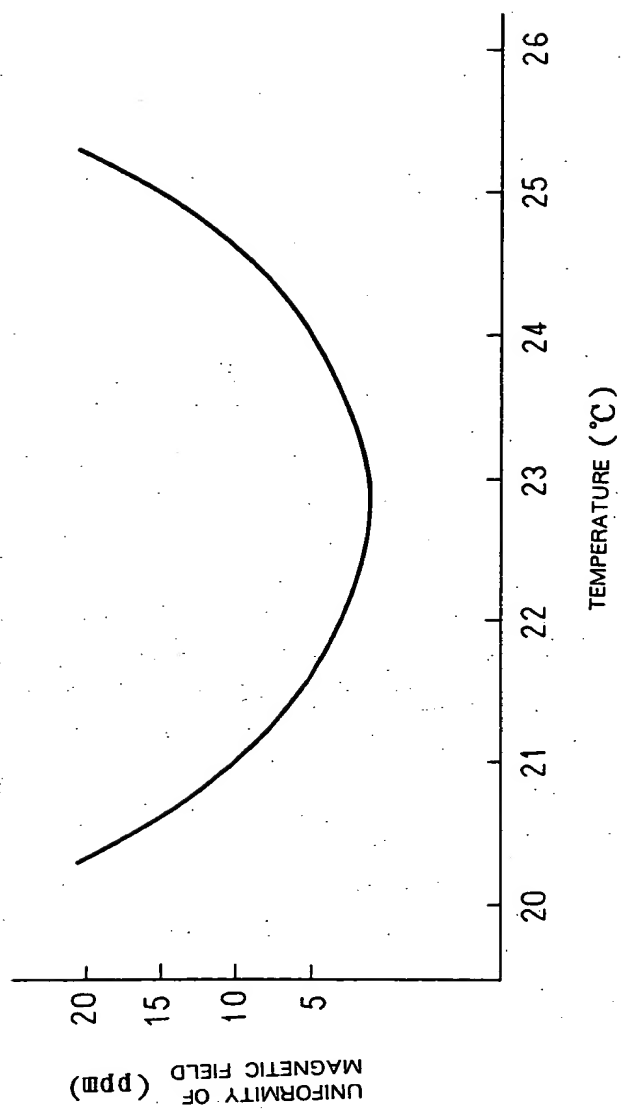


FIG.4

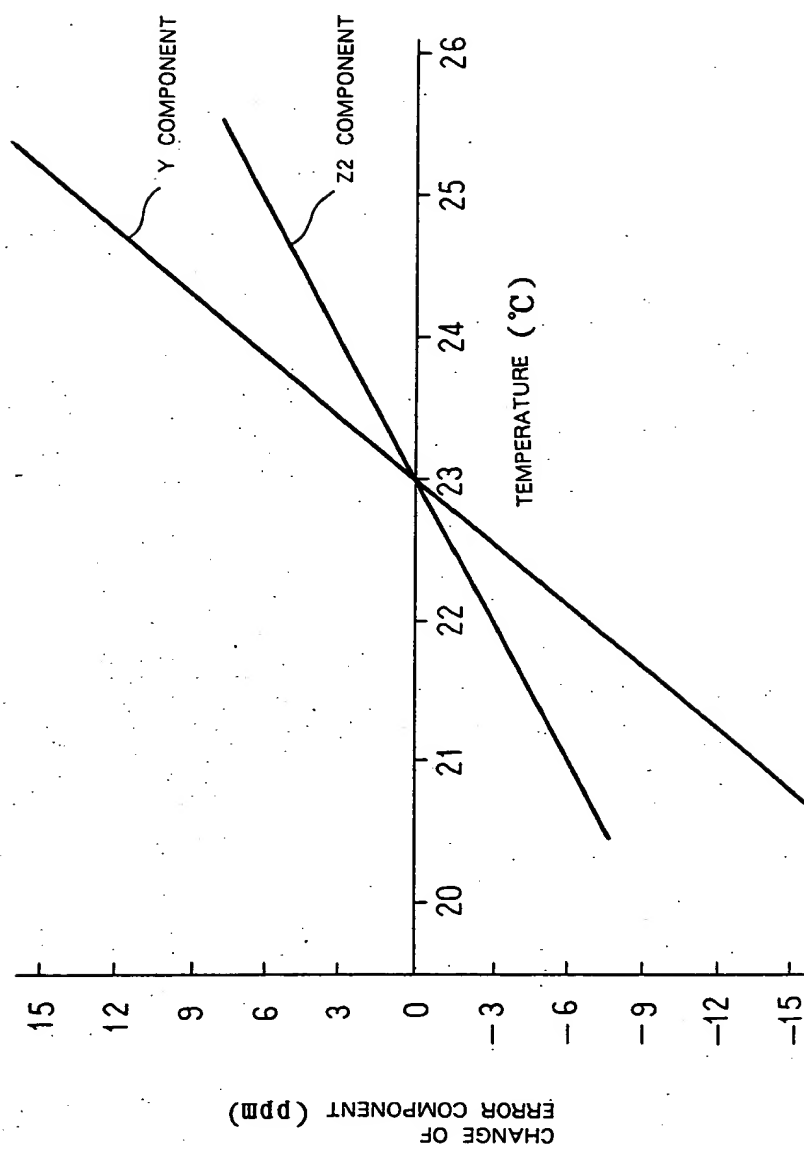


FIG.5


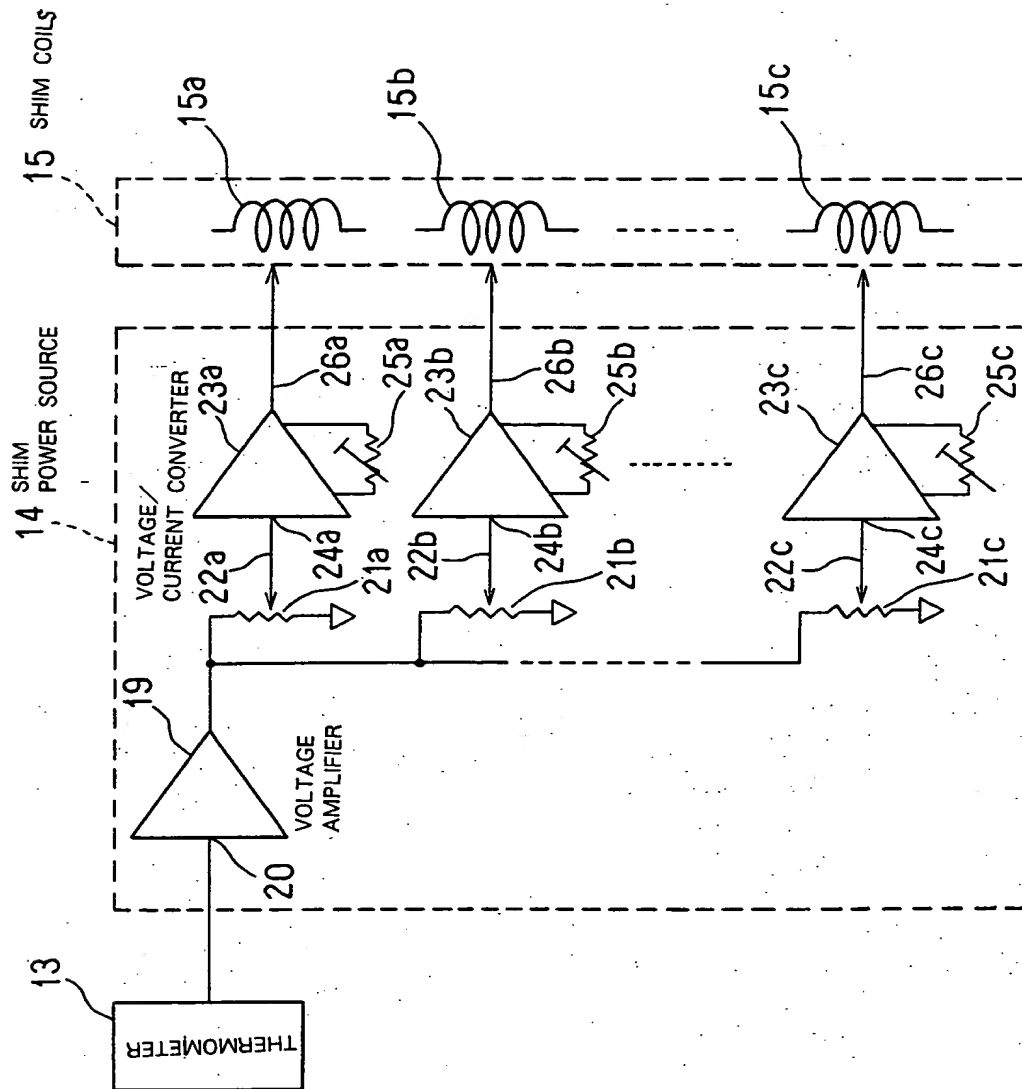


FIG.6

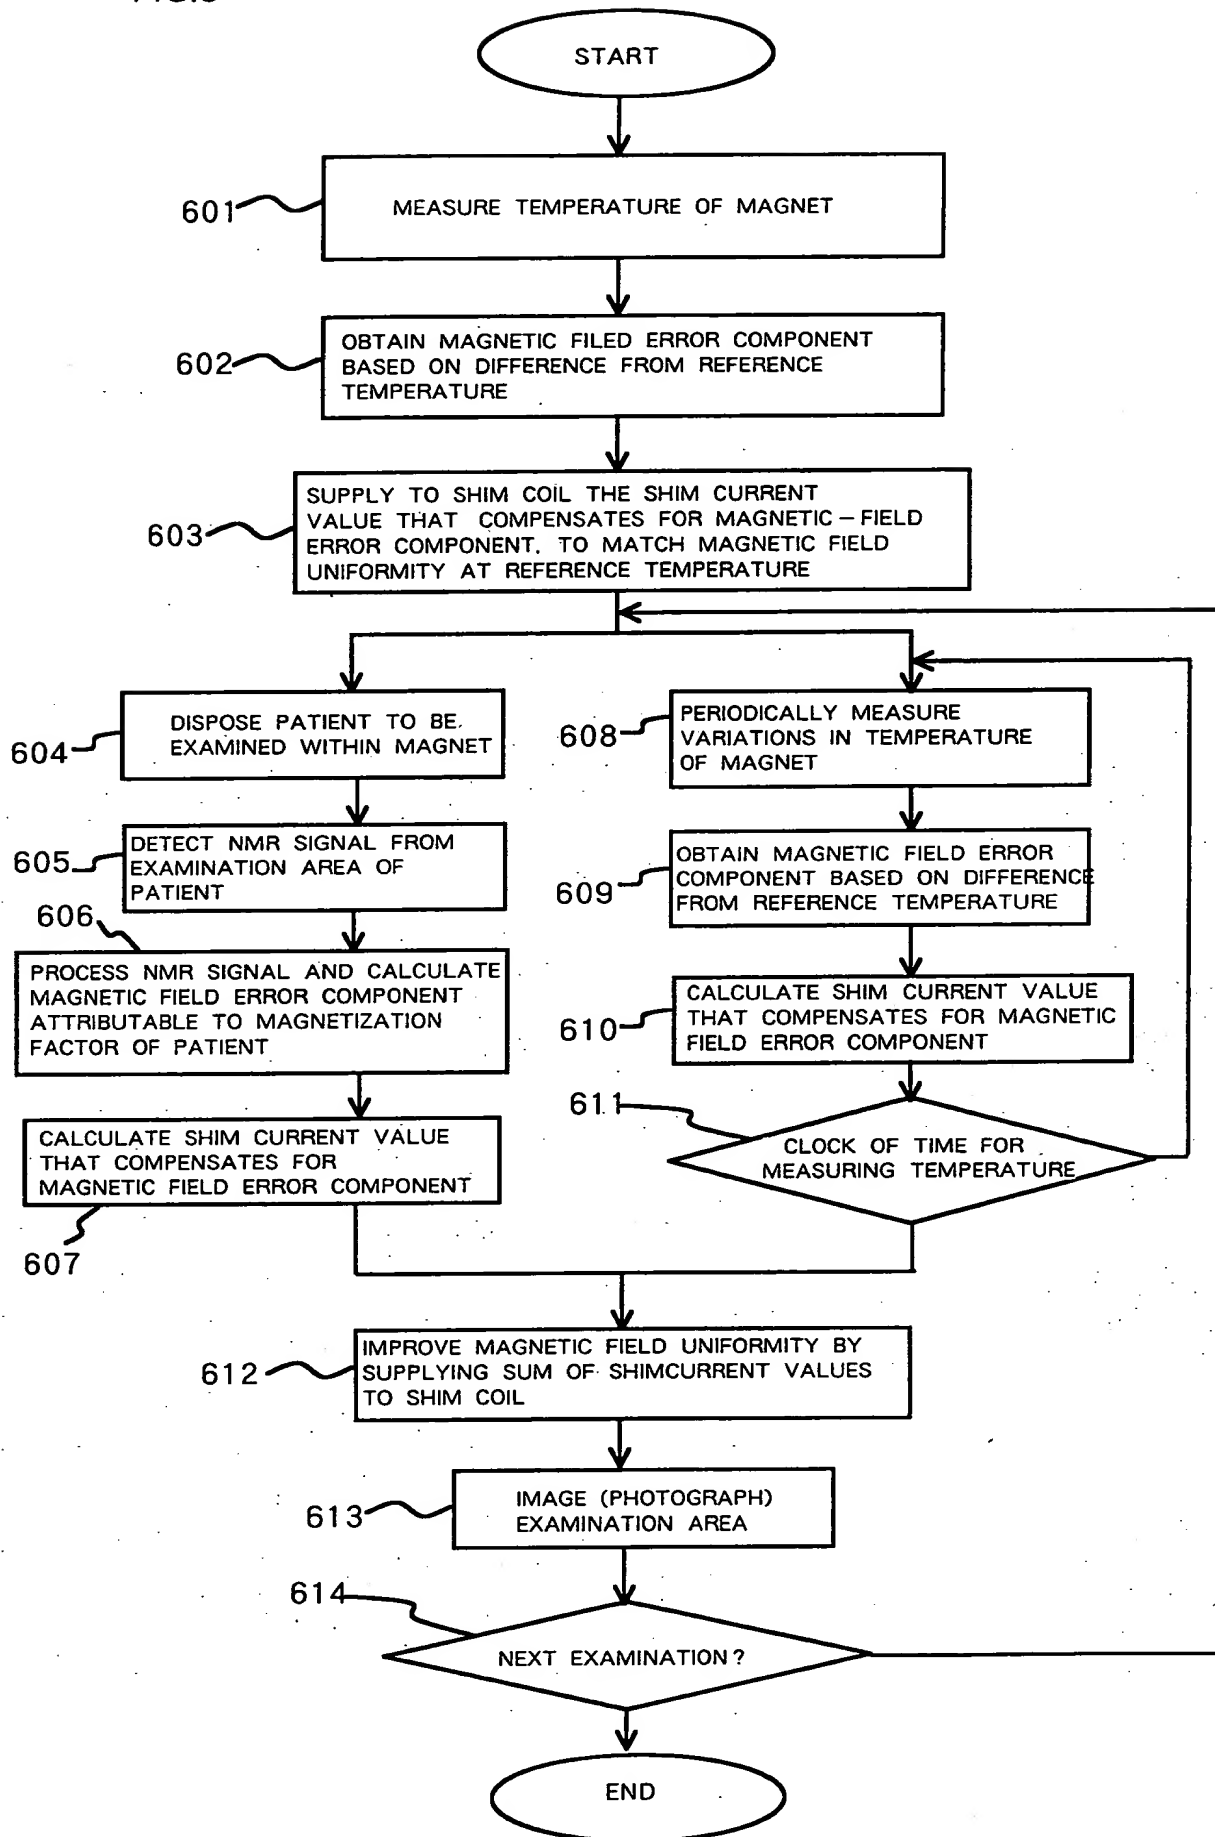

[Name of Document] ABSTRACT

[Abstract]

[Problem to be solved] To eliminate ununiformity of the magnetic field corresponding to variations in temperature and to provide an MRI apparatus that can achieve high uniformity of the magnetic field and that can improve the quality of MRI examination data.

[Means for solving the problems]

An MRI apparatus includes a unit (shim coil) that corrects uniformity of a magnetic field, a temperature detecting unit that detects a temperature of a magnet or its surroundings, and a control unit that controls the shim coil based on the detected temperature. The control unit calculates an error component for changing the uniformity of the magnetic field at the detected temperature of the magnet or its surroundings (29,30), based on a temperature characteristic of uniformity of the magnetic field calculated in advance (27). Further, the control unit calculates a shim current that generates a correction magnetic field for canceling the error component (31), and drives the shim coil based on this shim current.

[Selected drawing] Fig. 2

DECLARATION

I, Kimiko Tada, registered patent attorney, of Ishigaki Bldg. 2F, 519 Waseda Tsurumaki-cho, Shinjuku-ku, Tokyo 162-0041, Japan hereby declare that I have translated, into English, Japanese Patent Application No. 11-83744 filed on March 26, 1999, and that the attached copy is a true translation thereof to the best of my knowledge and belief.

Dated this 18th day of April, 2002

A handwritten signature in cursive script, appearing to read "K. Tada", is written above a horizontal line.

Kimiko Tada